

Factory

As an experienced professional manufacturer, we operate all the functions strictly under the standards of ISO9001 and ISO14001. Now we are running "5S" level management around the whole factory.

Before production, we set strict material inspection to control the quality of original materials.

During production, we set semi-finished products and finished products inspection. And salt spray test, thermal cycle test, and waterproof test when necessary.

After production, we have pressure test and drop test for the package.

In one word, we do our best to offer the most reliable products and super service, to get the highest customer satisfaction.



工厂简介

诺奈特工厂位于深圳市宝安区。坐拥完善的产业链以及优质的原材料供应链，使我们能更快捷更高效的为国内外客户提供优质产品和服务。

工厂严格按照ISO9001:2000国际质量管理体系和ISO14001国际环境管理体系实施生产和运营，并贯彻5S管理。使我们的所有环节均符合国际标准。

我们对生产的产品实施严格的检测流程，包括来料检测、半成品检测、成品检测，以及必要的盐雾耐腐测试、防水测试、包装跌落测试等。

依托我司成熟的订单处理系统和生产排单以及质量把控体系，我们致力于为客户提供最高产品可靠度和最高满意度。

Company Profile

Noonlight co., Ltd. owing over 5 years experience of R&D and manufacturing LED products, was initially established in 2007. We have branches in Zhuhai, Zhongshan, Chongqing and so on. And we devote ourselves into LED industry.

NOONLIGHT, as a wholly-owned brand of Noonlight Company, stands for High quality, Reliability and Satisfaction. Our products are widely used in decorative lighting, commercial lighting and Architectural Lighting, including:

- Flexible and rigid LED strips
- LED Neon Flex and LED modules
- LED tubes (T10, T8, T5)
- LED bulbs and LED spotlight
- LED panels and LED downlights
- LED pixel tubes and pixel lamps
- LED wallwashers and LED flood lamps
- Controllers and power supply

We strictly operate all functions under the standards of ISO9001 international management system and the ISO14001 international environmental management system.

Relying on the strong R&D, manufacturing and marketing ability, NoonNLIGHT has already achieved success in development of worldwide sales network and selling its products to over 30 countries in the world.

With aggressive policy and win-win strategy, NoonNLIGHT has been recognized for its products and brand that have been gradually become a famous brand in many countries due to the advantage of producing technics and high quality we insist..

NOONLIGHT is willing to cooperate with customers all over the world to develop LED lighting business in the future to reach the goal of mutual benefit and make the world more beautiful and green.

公司介绍

诺奈特有限公司 (NOONLIGHT) 最初成立于2007年,是一家专业半导体照明灯饰灯具制造商。以 NOONLIGHT® 作为公司对外品牌。

NOONLIGHT致力于商业照明产品,推广半导体照明产品的替代和普及。同时为国内外广大工程商提供最优质的灯饰和亮化装饰工程产品以及配套服务。

我们同时更着眼于海外渠道的开发和拓展。在将来提升企业的国际竞争力和优势。

我司产品涵盖灯饰、商业照明、户内外亮化工程等方面,包括:

- LED软灯条、霓虹软灯管
- LED硬灯条、模组
- LED日光灯管 (T10, T8, T5)
- LED球泡灯、射灯
- LED筒灯、平板灯
- LED护栏管、点光源
- LED洗墙灯、投光灯
- LED控制器、电源等

凭借优异的产品品质和卓越的服务精神,赢得了客户的广泛认可与赞誉。

凭借强大的研发力量和广阔的分销网络体系,致力于新型绿色照明产品的开发和和谐光环境的营造,诺奈特不断保持着积极创新的激情。

公司信守客户第一、员工第二、股东第三的原则,秉承公司“做百年企业”的目标;重视且在不断完善基础管理,员工实行了科学的分股配工制度,用心打造质量放心诺奈特三大品牌。

秉承“创中国品牌,争行业领先”的经营理念,推广LED节能照明产品,并推行节能照明文化。

NOONLIGHT必将坚持不懈的与广大客户一道,不断推动和引领我国节能照明文化和绿色光环境营造向前发展。


Constant Current LED Strip Light

Features

NoonLight Constant Current LED Strip Light Series adopts high qualith Fairchild/NXP ICs, which could allows longer continous length than standard LED Strips, which could save a lot of labor costs during installation. With smaller voltage drop, NoonLight Constant Current LED Strip Light series have very uniform light effect.



5050 Constant Current LED Strip Light



The ONLY RGB Constant Current LED STRIP Light in the market




Item No.	Input Voltage	Light Source	Color	IC Type	PCB Width	Power	Max. Connection	Min. Cutting Length
NL-FS0230C-24	24VDC	5050 SMD 60LEDs/m	R,G, B, Y, A, W,RGB	Fairchild /NXP	10mm	12W/m	20m	10cm

LED STRIP

ALUMINUM PROFILE

PIXEL LIGHT

5630/5730 Constant Current LED Strip Light



POWERED BY:



Item No.	Input Voltage	Light Source	Color	IC Type	PCB Width	Power	Max. Connection	Min. Cutting Length
NL-FS0630C-24	24VDC	5630 SMD 60LEDs/m	R,G, B, Y, A, W	Fairchild/NXP	12mm	12W/m	20m	10cm
NL-FS0635C-24		5630 SMD 70LEDs/m				15W/m		

Constant Current LED Strip Light

Features


NoonLight Constant Current LED Strip Light Series adopts high quality Fairchild/NXP ICs, which could allow longer continuous length than standard LED Strips, which could save a lot of labor costs during installation. With smaller voltage drop, NoonLight Constant Current LED Strip Light series have very uniform light effect.



2835 Constant Current LED Strip Light



Color:




LED STRIP
ALUMINUM PROFILE
PIXEL LIGHT

Item No.	Input Voltage	Light Source	Color	IC Type	PCB Width	Power	Max. Connection	Min. Cutting Length
NL-FS0530C-24	24VDC	2835 SMD 60LEDs/m	R,G, B, Y, A, W	FC/NXP	10mm	12W/m	20m	10cm
NL-FS0535C-24		2835 SMD 70LEDs/m				15W/m		

3528 Constant Current LED Strip Light



Color:




Item No.	Input Voltage	Light Source	Color	IC Type	PCB Width	Power	Max. Connection	Min. Cutting Length
NL-FS0130C-24	24VDC	3528 SMD 60LEDs/m	R,G, B, Y, A, W	FC/NXP	10mm	4.8W/m	20m	10cm
NL-FS0135C-24		3528 SMD 70LEDs/m				5.76W/m		

Why high CRI:

The Color Rendering Index (CRI), also known by some as color accuracy, is a term of measurement of how natural the light given off by a source looks in comparison to the sun.

High CRI full spectrum lighting can dramatically improve the appearance of objects, particularly in retail stores, shops, super-markets, museums, galleries and exhibits where red colors are prominent and presentation and appearance are critical.

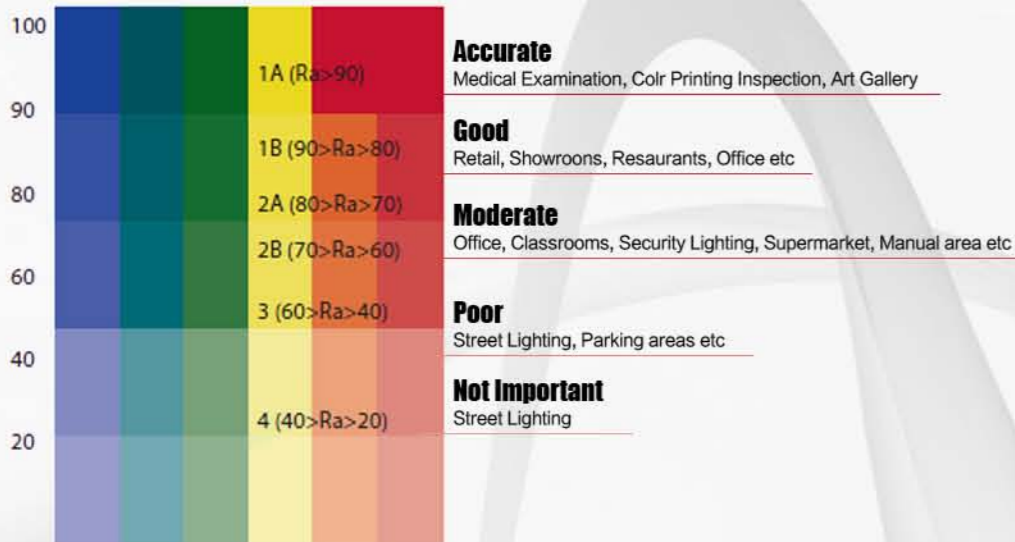

CRI > 70




CRI > 90

NOONLIGHT VIVIDCOLOR LED Strip Light adopt high CRI(color rendering index) lightsource, which create more vivid colors.

This series are designed to be used in high end locations, such as:

- grocery product and product display,
- art gallery and museums,
- retail location and dressing
- under residential cabinets and cupboards



VIVIDCOLOR 2835 LED STRIP LIGHT



Item No	Input Voltage	Lightsource	Color	CRI	PCB Width	Power	Efficiency
NL-FS06H30W-12	12VDC	2835SMD, 60LEDs/	2700K, 3000K, 4000K, 5700K, 6500K	>90	8mm	12W/m	86lm/W

VIVIDCOLOR 5630 LED STRIP LIGHT



Item No	Input Voltage	Lightsource	Color	CRI	PCB Width	Power	Efficiency
NL-FS05H30W-12	12VDC	5630SMD, 60LEDs/	2700K, 3000K, 4000K, 5700K, 6500K	>90	10mm	18W/m	82lm/W

NoonLight Co., LTD.

Add: 4th floor, Building C, Sanming Industrial Park,Shiyan Town, Bao'an Area, Shenzhen, China.
Tel: 86-755-2900 5877, Email: sales@noonlighting.com Website: www.noonlighting.com



NoonLight Co., LTD.

Add: 4th floor, Building C, Sanming Industrial Park,Shiyan Town, Bao'an Area, Shenzhen, China.
Tel: 86-755-2900 5877, Email: sales@noonlighting.com Website: www.noonlighting.com



LED软灯条 FLEXIBLE LED STRIP LIGHT

FEATURES

- Super slim, suitable for various applications
- Super bright 3528, 5050 and 335 SMD are adopted as light source
- Working voltage of 12VDC or 24VDC, very safe
- Available with various densities of 30LEDs/m, 48LEDs/m, 60LEDs/m, 72LEDs/m and 120LEDs/m
- Available with various IP ratings for interior & exterior applications: IP20, IP65, IP66, IP68
- Cut-table & Re-connectable, available in your designed length
- Copper track for effective heat dissipation, allowing for long lifespan and low light decay
- 3M double sided led tape backing or fixing clips supplied for easy installation
- Very low power consumption, 2.4W/m~14.4W/m

产品特性

- 纤细柔软，适用于各种应用场所
- 采用超高亮贴片3528, 5050 和335作为光源
- 安全直流低压12V或24V供电
- 采用高粘度3M双面胶或硅胶卡固定，易于安装
- 不同规格可选:30LEDs/m, 48LEDs/m, 60LEDs, 72LEDs/m, 120LEDs/m
- 多种防护级别: IP20, IP65, IP66, IP68, 适用于室内外应用
- 易于剪切和连接以满足各种设计长度
- 背贴3M双面胶，或提供固定夹，易于安装
- 纯铜PCB板，超强散热以保证灯条超长使用寿命，超低光衰
- 超低功耗，2.4W~14.4W/米

APPLICATIONS

- Signage & Backlights
- Product display
- Marine Lighting
- Landscape lighting
- Kitchen & Cabinet Lighting
- Cove lighting
- Mood Lighting

产品应用



- 标识、灯箱、吸塑字、背光
- 产品展示
- 船舶装饰
- 建筑亮化
- 橱柜照明
- 暗槽照明
- 氛围照明



单色3528 LED软光条系列 SINGLE COLOR 3528 FLEXIBLE LED STRIP LIGHT



Color/颜色:




型号 Item No.	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	连接使用长度 Max. Connection	最短裁切长度 Min. cutting length
NL-FS0130C-12	12VDC	3528 SMD	30LEDs/m	120°	2.4W/m	IP20 IP65 IP66 IP68	W8xH0.2mm(IP20) W8xH2mm(IP65) W10xH2mm(IP66) W10xH3mm(IP68)	For runs over 5m individual lengths should be connected in parallel 串联5米，如需长于5米，建议并联	10cm
NL-FS0148C-12(24)	12VDC/24VDC		48LEDs/m		3.84W/m				6.25cm(12V) 12.5cm(24V)
NL-FS0160C-12(24)			60LEDs/m		4.8W/m				5cm(12V) 10cm(24V)
NL-FS0172C-12(24)			72LEDs/m		5.76W/m				4.16cm(12V) 8.32cm(24V)
NL-FS01120C-12(24)			120LEDs/m		9.6W/m				2.5cm(12V) 5cm(24V)
NL-FS01240C-12(24)			240LEDs/m		19.2W/m				2.5cm(12V) 5cm(24V)

*Add suffix DA, ST and STG to item no. for IP65, IP66, IP68 LED Strip
IP65, IP66, IP68软光条，请在型号后加DA, ST和STG

单色侧发光LED软光条系列 SINGLE COLOR SIDE VIEW FLEXIBLE LED STRIP LIGHT

Color/颜色:



型号 Item No.	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	连接使用长度 Max. Connection	最短裁切长度 Min. cutting length
NL-FS0430C-12	12VDC	335 Side emitting SMD	30LEDs/m	120°	2.4W/m	IP20 IP65 IP66 IP68	W8xH0.2mm(IP20) W8xH2mm(IP65) W10xH2mm(IP66) W10xH3mm(IP68)	For runs over 5m individual lengths should be connected in parallel 串联5米，如需长于5米，建议并联	10cm
NL-FS0160C-12			60LEDs/m		4.8W/m				5cm

*Add suffix DA, ST and STG to item no. for IP65, IP66, IP68 LED Strip
IP65, IP66, IP68软光条，请在型号后加DA, ST和STG

单色5050 LED软光条系列

SINGLE COLOR 5050 FLEXIBLE LENS LED STRIP LIGHT


Color/颜色:

White Red Green Blue Yellow Amber
白 红 绿 蓝 黄 琥珀



RGB 5050 LED软光条系列

RGB COLOR 5050 FLEXIBLE LED STRIP LIGHT

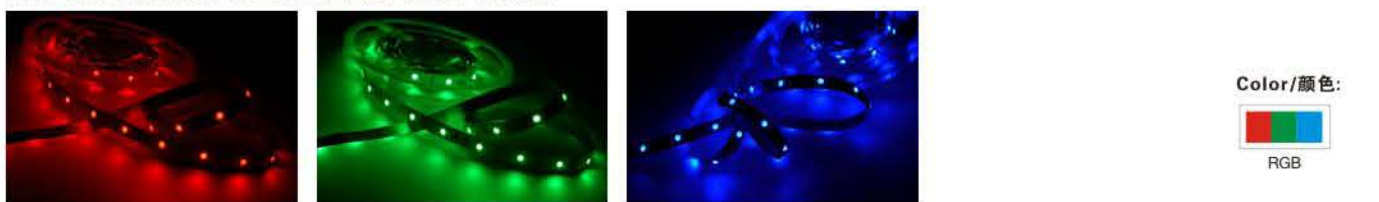

Color/颜色:

RGB

ADVANTAGES

- The color can be changed with a remote controller.
- More than 40 changing programs.
- Can easily create a colorful effect

产品优势

- 可通过遥控器实现变色
- 多达40余种变化模式
- 可轻松实现多种色彩跳动变换效果。

型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	连接使用长度 Max. Connection	最短裁切长度 Min. cutting length
NL-FS0230C-12	12VDC	5050 tri-chips SMD	30LEDs/m	120°	7.2W/m	IP20	W10xH0.2mm(IP20)	For runs over 5m individual lengths should be connected in parallel in parallel 串联5米, 如需长于5米, 建议并联	10cm
NL-FS0248C-12	12VDC/24VDC		48LEDs/m		11.5W/m	IP65	W10xH2mm(IP65)		6.25cm(12V) 12.5cm(24V)
NL-FS0260C-12			60LEDs/m		14.4W/m	IP68	W12xH3mm(IP68)		5cm(12V) 10cm(24V)

*Add suffix DA, ST and STG to item no. for IP65, IP66, IP68 LED Strip
IP65, IP66, IP68软光条, 请在型号后加DA, ST和STG


幻彩RGB LED软光条系列

MAGIC RGB COLOR FLEXIBLE LED STRIP LIGHT



Color/颜色:

RGB

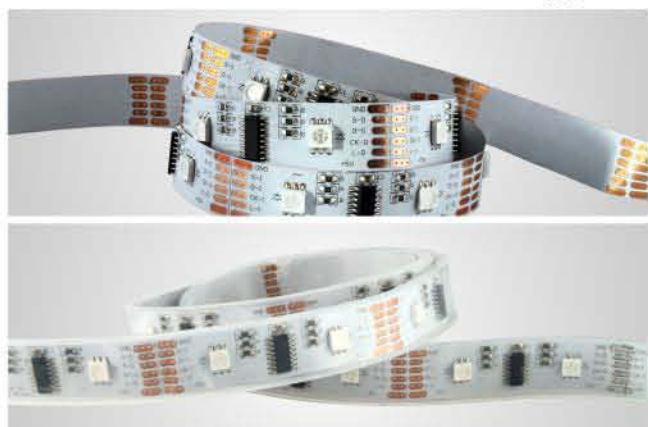

ADVANTAGES

- Via the magic remote controller, the colors can be changed into different types.
- More than 80 changing programs
- Dynamic changing and flowing effect can be easily achieved.

产品优势

- 通过幻彩控制器变化各种色彩效果
- 超过80余种变化模式
- 轻松实现各种动态色彩流动效果跑马效果等。

型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	连接使用长度 Max. Connection
SL-FS0230RGBD-12	12VDC	5050 tri-chips RGB	30LEDs/m	120°	7.2W/m	IP20 IP66	W15xH0.2mm(IP20) W17xH2mm(IP66)	For runs over 10m individual lengths should be connected in parallel 串联10米, 如需长于10米, 建议并联

*Add suffix ST to item no. for IP66 LED Strip
IP66软光条, 请在型号后加ST

单色5050凸透镜 LED软光条系列

SINGLE COLOR 5050 FLEXIBLE LENS LED STRIP LIGHT

ADVANTAGES

- With cutting edge technology, our newly developed LENS LED strip light ranges, which could have 1.5 times more brightness than standard led strips light with same specification, even more energy saving.
- 60-70° beam angle is another great advantage which could deliver more straight and sharp light effect
- IP20 and IP65 versions available, suitable for interior & exterior applications

产品优势

- 我司独有专利产品, 凸透镜聚光款超高亮5050灯条, 依托先进的设计工艺, 使得正向光线亮度达到原有灯条的1.5倍。比需要达到同等亮度的灯条节约成本近50%。
- 同时, 严格控制在60到70度发光角度, 这一优势使得我司此款灯条出光更锐利, 方向性更强
- IP20和IP65防护级别, 适用于室内外应用

Color/颜色:

White
白



型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	连接使用长度 Max. Connection	最短裁切长度 Min. cutting length
NL-FS0230C-12-L	12VDC	5050 tri-chips SMD	30LEDs/m	60-70°	7.2W/m	IP20 IP65	W10xH0.2mm(IP20) W10xH2mm(IP65)	For runs over 5m individual lengths should be connected in parallel 串联5米, 如需长于5米, 建议并联	10cm
NL-FS0248C-12(24)-L	12VDC/24VDC		48LEDs/m		11.5W/m				6.25cm(12V) 12.5cm(24V)
NL-FS0260C-12(24)-L			60LEDs/m		14.4W/m				5cm(12V) 10cm(24V)

*Add suffix DA to item no. for IP65 LED Strip.
IP软光条, 请在型号后加DA

恒流LED软光条系列

Constant Current LED Strip Light



Color/颜色:

White Red Green Blue Yellow Amber
白 红 绿 蓝 黄 琥珀

ADVANTAGES

- Special constant current ICs are adopted
- Max. connection of 15m in series
- Few voltage drop, consistent light output
- Especially suitable for applications where have strict requirements of uniform light.

产品优势

- 灯条采用专用恒流IC
- 最长可串联达15米, 而普通光条仅有5米
- 较普通led灯条相比, 本款灯条从头到尾的亮度几乎没有亮度差, 一致性好
- 尤适用于对光线均匀度有苛刻要求的地方

型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	防护级别 IP Rating	连接使用长度 Max. Connection	最短裁切长度 Min. cutting length
NL-FS0160C-12(24) CC	12VDC/24VDC	3528 SMD LEDs	60LEDs/m	120°	4.8W/m	IP20 IP65	W12xH0.2mm(IP20) W12xH2mm(IP65)	For runs over 15m individual lengths should be connected in parallel 串联15米, 如需长于5米, 建议并联	5cm(12V) 10cm(24V)
NL-FS0260C-12(24) CC		5050 tri-chips SMD			14.4W/m	IP66 IP68	W14xH2mm(IP66) W14xH3mm(IP68)		6.25cm(12V) 12.5cm(24V)

*Add suffix DA, ST and STG to item no. for IP65, IP66, IP68 LED Strip.
IP65, IP66, IP68软光条, 请在型号后加DA, ST和STG

LED硬光条
RIGID LED BAR



FEATURES

- Super slim, suitable for various applications
- Super bright 3528 and 5050 are adopted as light source
- Working voltage of 12VDC or 24VDC, very safe
- Available with various density of 60LEDs/m, 72LEDs/m and 120LEDs/m
- Available with various IP ratings for interior & exterior applications: IP20, IP65
- Cut-table & Re-connectable, available in your designed length, suitable for different sizes of lightbox.
- 3M double sided tape backing or fixing clips supplied for easy installation
- Aluminum pcbs are adopted for effective heat dissipation, allowing for low light decay and long lifespan.

APPLICATIONS

- Exterior and interior decorative lighting.
- Product display & case & sales counter.
- Cove lighting and edge lighting.
- Back light for light box and signs.

产品特性

- 超薄纤细, 适用于各种应用场所
- 采用超高亮3528和5050贴片作为光源
- 安全直流低压12V或24V供电
- 不同规格可选: 60LEDs/m, 72LEDs/m 和 120LEDs/m
- 不同的防护级别可选: IP20, IP65, 适用于室内外应用
- 易于剪切和连接以满足各种设计长度, 可适用于不同尺寸的灯箱
- 背贴3M双面胶, 或提供固定夹, 易于安装
- 高导热铝基板, 超强散热以保证灯条超长使用寿命, 超低光衰

产品应用

- 室内外装饰照明
- 柜台照明
- 暗槽灯
- 轮廓勾勒
- 灯箱背光 和 广告标识等

单色3528 LED硬灯条系列
SINGLE COLOR 3528 RIGID LED BAR


Color/颜色:



型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	最短裁切长度 Min. cutting length
NL-LB0110060C-12	12VDC	3528 SMD	60LEDs	120°	4.8W	IP20 IP65	L1000XW8XH2mm(IP20) L1020XW12XH8mm(IP65)	5cm(IP20) NA(IP65)
NL-LB0110072C-12			72LEDs		5.76W			4.17cm(IP20) NA(IP65)
NL-LB01100120-12(24)	12VDC/24VDC		120LEDs		9.6W			2.5cm(12V,IP20) 5cm(24V,IP20) NA(IP65)

*Add suffix DA to item no. for IP65 LED Bar
IP65硬光条, 请在型号后加DA

单色5050 LED硬光条系列
SINGLE COLOR 5050 RIGID LED BAR

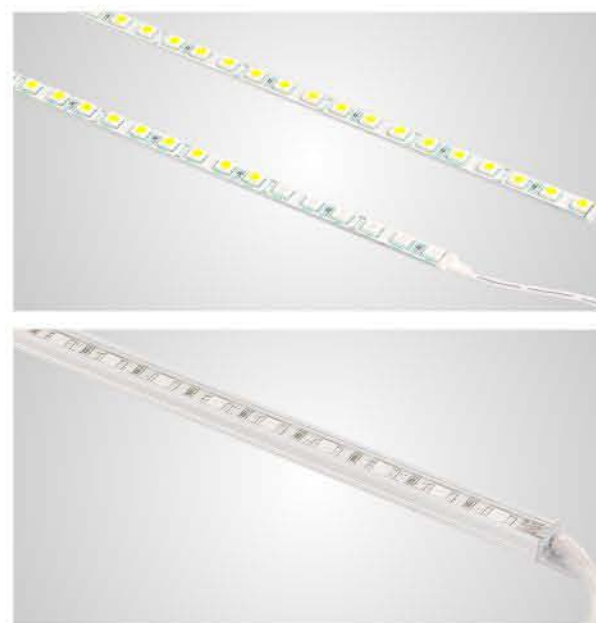

Color/颜色:



型号 Item No	输入电压 Input Voltage	LED种类 LED Type	LED数量 LED Qty	光束角 Beam Angle	功率 Power	防护级别 IP Rating	产品尺寸 Dimension	最短裁切长度 Min. cutting length
NL-LB0210060C-12	12VDC	5050 tri-chips SMD	60LEDs	120°	14.4W	IP20 IP65	L1000XW10XH2mm L1000XW14XH8mm	5cm(IP20) NA(IP65)
NL-LB0210072C-12			72LEDs		17.28W			4.17cm(IP20) NA(IP65)

*Add suffix DA to item no. for IP65 LED Bar
IP65硬光条, 请在型号后加DA

4-LEVEL DIMMABLE TOUCH SWITCH LED DESK LAMP

Input Voltage: 110-240VAC

Working Voltage: DC24V

External UL/GS certificated LED Driver

Power: 8W/6.5W/5W/1.5W

Ergonomically Controlled, 4-level of dimming.

Flicking free, eye-protection




Item No: NL-DL931

Gooseneck arm, very flexible to any angles

Various color available.

3000-4500K Color Changable

5 gears positions controlled or slippery

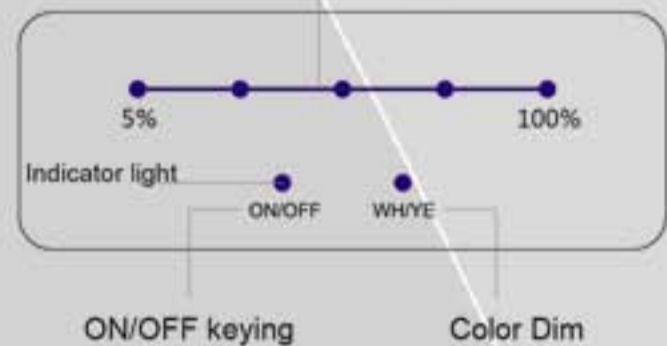

NoonLight Co., LTD.

Add: 4th floor, Building C, Sanming Industrial Park,
Shiyan Town, Bao'an Area, Shenzhen, China.

Tel: 86-755-2900 5877, Fax: 86-755-29005877-8001

Email: sales@noonlighting.com

Website: www.noonlighting.com



4-LEVEL DIMMABLE TOUCH SWITCH LED DESK LAMP

Input Voltage: 110-240VAC

Working Voltage: DC24V

External UL/GS certificated LED Driver

Power: 8W/6.5W/5W/1.5W

Ergonomically Controlled, 4-level of dimming.

Flicking free, eye-protection



Item No: NL-DL924



358 ° rotatable
Apple look design



NoonLight Co., LTD.

Add: 4th floor, Building C, Sanming Industrial Park,
Shiyan Town, Bao'an Area, Shenzhen, China.

Tel: 86-755-2900 5877, Fax: 86-755-29005877-8001

Email: sales@noonlighting.com

Website: www.noonlighting.com



4-LEVEL DIMMABLE TOUCH SWITCH LED DESK LAMP

Input Voltage: 110-240VAC

Working Voltage: DC24V

External UL/GS certificated LED Driver

Power: 8W/6.5W/5W/1.5W

Ergonomically Controlled, 4-level of dimming.

Flicking free, eye-protection

Item No: NL-DL921



USB Power Port



Robust modular design
for easy assembly

NoonLight Co., LTD.

Add: 4th floor, Building C, Sanming Industrial Park,
Shiyan Town, Bao'an Area, Shenzhen, China.

Tel: 86-755-2900 5877, Fax: 86-755-29005877-8001

Email: sales@noonlighting.com

Website: www.noonlighting.com

